





ARCHITECTURAL FX

Integrate DTW (Dim to Warm)

General Information

- Flexible LED strip IP20
- 24v DC Constant Voltage
- Beam angle: 120°
- CRI >90
- R9 >55
- Increments 62.5mm
- LED Pitch: 4.46mm
- Lifespan L70: ≥ 50,000 hours
- Dimmable – DALI, DMX, 0-10v
- Max Ambient operating temperature (10.5w/m 50°c)
- Integrate fixtures IP40, IP44
- 5 Year warranty

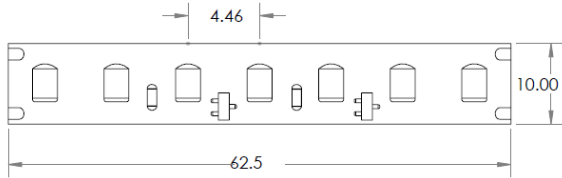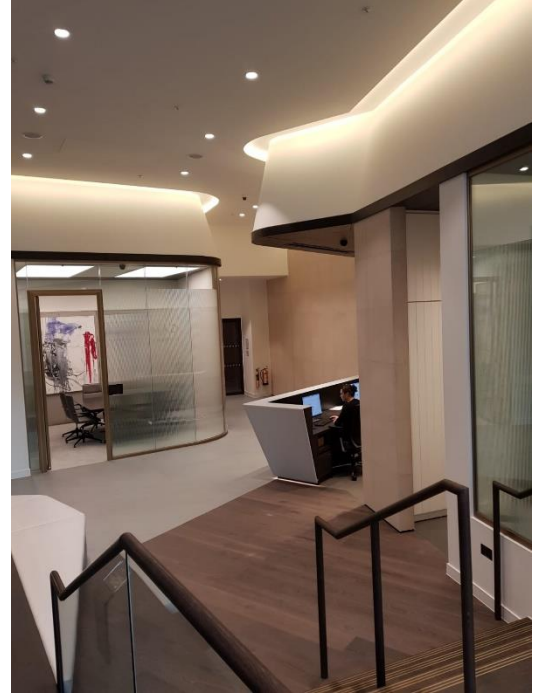

Integrate LED Code	CCT	10.5w/m
DTW	2200-4000k	700 lm/m

Note: -40% light loss with Opal cover

About the Light source:

24v, flexible LED strip with reflective, white surface and 3M adhesive tape on the back. Homogeneous light source for fixtures with Opal covers <25mm from LED to Opal cover. Bridgelux LEDs of the highest quality. 120° beam angle.

“One Bin Only” within 2 MacAdam

Integrated Constant Current technology to guarantee Constant color and Intensity over from first to last LED over lifetime

About the Fixtures:

A portfolio of Aluminium Recessed, Surface Mounted, Suspended or Plaster-In profiles, covers and mounting accessories for Interior, Exterior architectural and commercial applications.

(See separate pdf catalogue and specification builder for options)