






ARCHITECTURAL FX

Integrate

DTWX (Dim to Warm)

General Information

- Flexible LED strip IP20
- 24v DC Constant Voltage
- Beam angle: 120°
- CRI >90
- R9 >80
- <2 SDCM
- Increments 33.3mm, 62.5mm
- LED Pitch: 5.55mm, 4.46mm
- Lifespan L80: ≥ 50,000 hours
- Dimmable – DALI, DMX, 0-10v
- Max Ambient operating temperature (10w/m 50°C)
- Integrate fixtures IP40, IP44
- **5 Year warranty (10 Year warranty Information on request)**

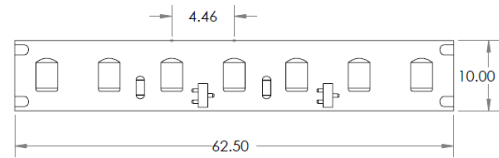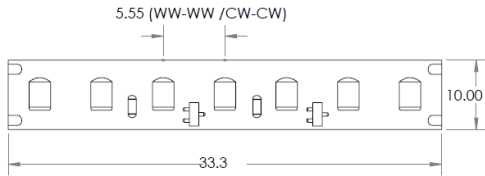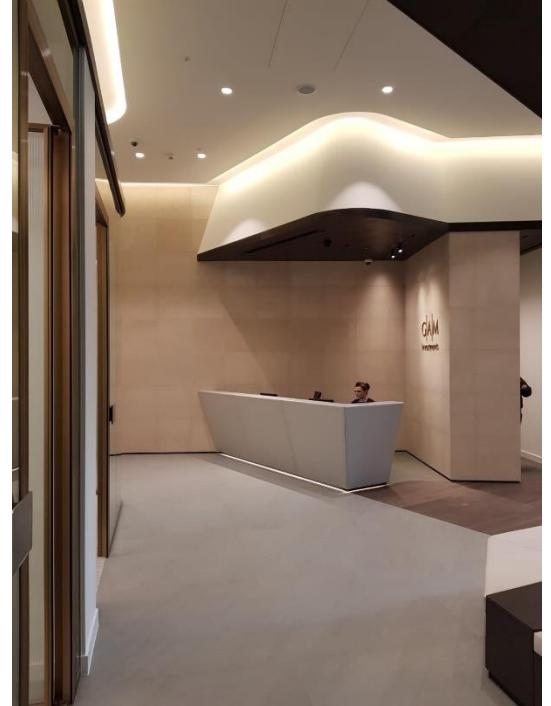

1900-3000k - 10w, 20w/m LED Increment 33.3mm LED Pitch 5.55mm

2200-4000k - 10w/m LED Increment 62.5mm LED Pitch 4.46mm

Integrate LED Code	CCT	10w/m	20w/m
		lm/m	lm/m
DTWX	1900-3000k	670	1350
DTWX	2200-4000k	700	x

Note: -40% light loss with Opal cover

About the Light source:

24v, flexible LED strip with reflective, white surface and 3M adhesive tape on the back. Homogeneous light source for fixtures with Opal covers <15mm from LED to Opal cover. Bridgelux LEDs of the highest quality. 120° beam angle.

“One Bin Only” within 2 MacAdam

Integrated Constant Current technology to guarantee Constant color and Intensity over from first to last LED over lifetime

About the Fixtures:

A portfolio of Aluminium Recessed, Surface Mounted, Suspended or Plaster-In profiles, covers and mounting accessories for Interior, Exterior architectural and commercial applications.

(See separate pdf catalogue and specification builder for options)