
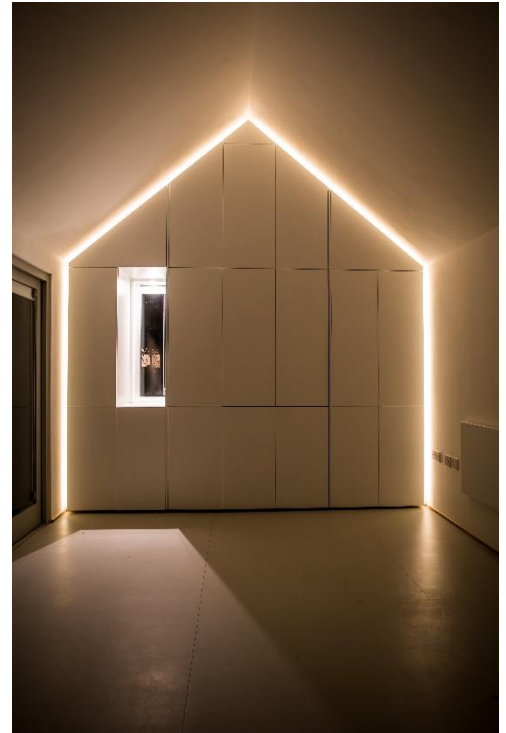


Integrate NLD

General Information

- Flexible LED strip IP20
- 24v DC Constant Voltage
- Beam angle: 120°
- CRI >95
- R9 >95
- Increments 125mm
- LED pitch: 19mm
- Lifespan L90: ≥ 60,000 hours
- Dimmable – Mains (Triac) DALI, DMX, 0-10v
- Max Ambient operating temperature (6-15w/m 50°C, 25w/m 45°C, 40w/m 35°C)
- Available IP40, IP44, IP67
- 7 Year warranty (Limited to 5,000hrs per year running)

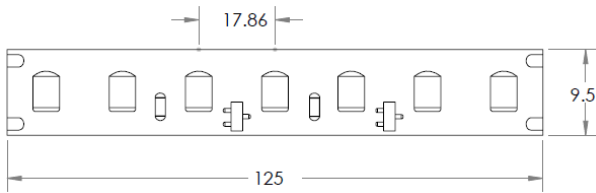

Integrate LED Code	CCT	6w/m	10w/m	15w/m	25w/m	40w/m	60w/m
		lm/m	lm/m	lm/m	lm/m	lm/m	lm/m
NLD	2000k	x	x	x	x	x	x
NLD	2200k	590	1160	1670	2670	4100	x
NLD	2500k	x	x	x	x	X	x
NLD	2700k	630	1230	1770	2830	4350	x
NLD	3000k	650	1270	1830	2930	4500	x
NLD	3500k	660	1290	1860	2980	4580	x
NLD	4000k	680	1330	1920	3070	4720	x
NLD	5000k	800	1570	2260	3620	5560	x

Note: -40% light loss with Opal cover

About the Light source:

24v, flexible LED strip with reflective, white surface and 3M adhesive tape on the back. Homogeneous light source for fixtures with Opal covers <15mm from LED to Opal cover. Osram LEDs of the highest quality. 120° beam angle.

“One Bin Only” within 3 MacAdam

Integrated Constant Current technology to guarantee Constant color and Intensity over from first to last LED over lifetime

About the Fixtures:

A portfolio of Aluminium Recessed, Surface Mounted, Suspended or Plaster-In profiles, covers and mounting accessories for Interior, Exterior architectural and commercial applications.

(See separate pdf catalogue and specification builder for options)