


Integrate

TW (Tunable White)

General Information

- Flexible LED strip IP20
- 24v DC Constant Voltage
- Beam angle: 120°
- CRI >95
- R9 >90
- <2 SDCM
- Increments 50mm
- LED Pitch: 8.92mm
- Lifespan L80: ≥ 50,000 hours
- Dimmable – DALI, DMX, 0-10v
- Max Ambient operating temperature (10-14.4w/m 50°C, 17-20w/m 45°C)
- Integrate fixtures IP40, IP44
- **5 Year warranty**

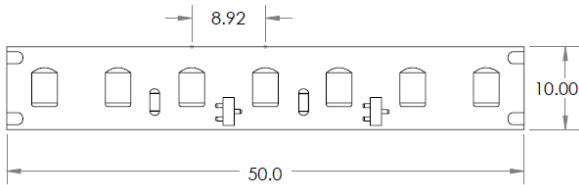

Integrate LED Code	CCT	9.6w/m	19.2w/m	38.4w/m
		lm/m	lm/m	lm/m
TW	2700-6000k	610	990	1390

Note: -40% light loss with Opal cover

About the Light source:

24v, flexible LED strip with reflective, white surface and 3M adhesive tape on the back. Homogeneous light source for fixtures with Opal covers <15mm from LED to Opal cover. Bridgelux LEDs of the highest quality. 120° beam angle.

“One Bin Only” within 2 MacAdam

Integrated Constant Current technology to guarantee Constant color and Intensity over from first to last LED over lifetime

About the Fixtures:

A portfolio of Aluminium Recessed, Surface Mounted, Suspended or Plaster-In profiles, covers and mounting accessories for Interior, Exterior architectural and commercial applications.

(See separate pdf catalogue and specification builder for options)