




ARCHITECTURAL FX

Integrate TWX (Tunable White)

General Information

- Flexible LED strip IP20
- 24v DC Constant Voltage
- Beam angle: 120°
- CRI >95
- R9 >90
- <2 SDCM
- Increments 50mm
- LED Pitch: 8.92mm (WW-WW, CW-CW)
- Lifespan L80: ≥ 50,000 hours
- Dimmable – DALI, DMX, 0-10v
- Max Ambient operating temperature (10-14.4w/m 50°C, 17-20w/m 45°C)
- Integrate fixtures IP40, IP44
- **10 Year warranty**

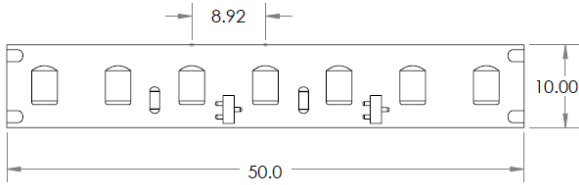

| Integrate LED Code | CCT | 10w/m | 14.4w/m | 17w/m | 20w/m |
|--------------------|------------|-------|---------|-------|-------|
| | | lm/m | lm/m | lm/m | lm/m |
| TWX | 2200-3000k | 660 | 940 | 1080 | 1220 |
| TWX | 2400-3500k | 685 | 965 | 1100 | 1245 |

Note: -40% light loss with Opal cover

About the Light source:

24v, flexible LED strip with reflective, white surface and 3M adhesive tape on the back. Homogeneous light source for fixtures with Opal covers <15mm from LED to Opal cover. Bridgelux LEDs of the highest quality. 120° beam angle.

“One Bin Only” within 2 MacAdam

Integrated Constant Current technology to guarantee Constant color and Intensity over from first to last LED over lifetime

About the Fixtures:

A portfolio of Aluminium Recessed, Surface Mounted, Suspended or Plaster-In profiles, covers and mounting accessories for Interior, Exterior architectural and commercial applications.

(See separate pdf catalogue and specification builder for options)