



240-24v DC Power Supply  
Recommended to load  
to 90% max power ECP  
or HIG Series.



+24V DC


Power supply to  
always dictate  
connected load of  
product subject  
to max output  
of interface.

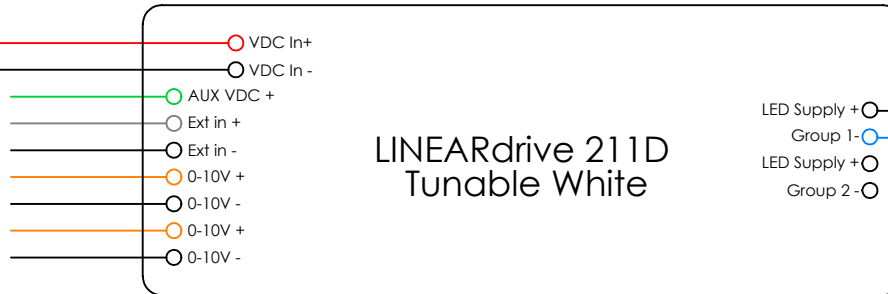

LINEARdrive 211D  
Tunable White

LED Supply + ○  
Group 1 - ○  
LED Supply + ○  
Group 2 - ○


0-10v control input. 2x +/- terminals to spread load.  
Single channels output only they do not work as  
separate channels. Use for CW channel.

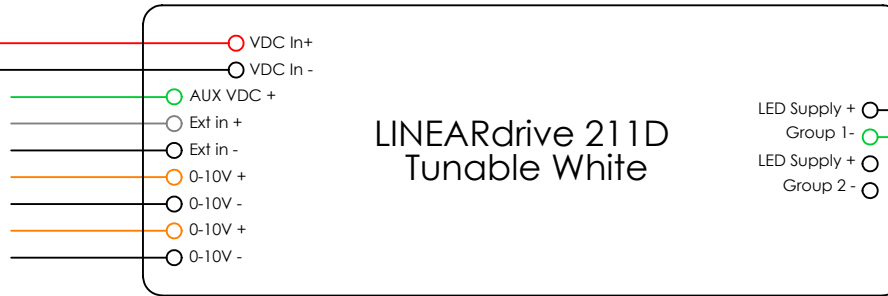

LINEARdrive 211D  
Tunable White

LED Supply + ○  
Group 1 - ○  
LED Supply + ○  
Group 2 - ○

**Pay Attention** to LED product polarity  
and terminal positions prior to connection

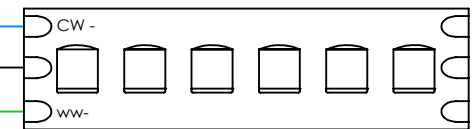

**IF ANYTHING ON THIS DRAWING IS NOT CLEAR, PLEASE CONTACT ARCHITECTURAL FX**