



ARCHITECTURAL FX


Wallpaper TW

(Tunable White)



Flexible LED Wallpaper, solvent and heat-resistant special silicone for indoor- and outdoor use
Tunable White 2700 -6300k (Finished CCT)
Cutttable every 20mm
LED spacing: 20mm
CRI 95
With or without spreader lens
Bending diameter: 60mm

Constant light output and extended lifetime due to an integrated constant current source on the circuit board.

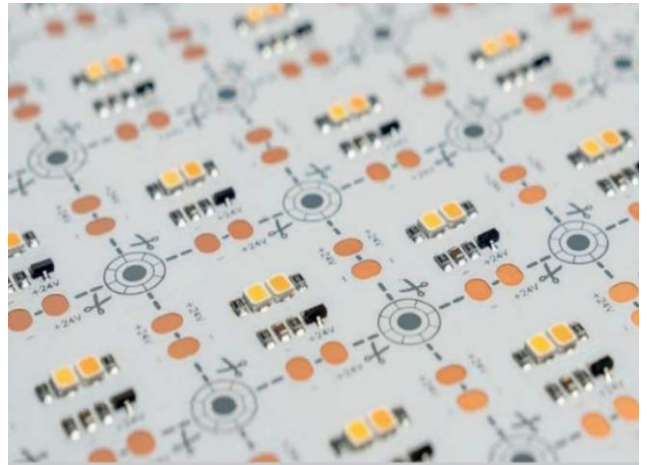

Electrical & output data

Input Voltage 24 Volt DC Constant Voltage (23 V min, 25 V max)

Temperature range: -20 to +45°C

Ambient temperature: +10 to +45°C

Storage temperature Ts min = -30°C, Ts max = 85°C

Dimmable – Dali, DMX

Lifetime and Warranty (See full Architectural FX total system warranty for more detail)

Lifespan L70: 50,000 hours

Product availability lifetime – 3 years from last order

End of Lifetime guarantee 5 years

The above data are typical values. Due to tolerances in the production process and electrical components, Values for light output and electrical power can vary up to 10%.

Product Options & References

Generic Product	Power per Panel	Panel Sizes	Colour (Finished CCT)	IP Rating	Lumens per Panel
Wallpaper	120w	480 x 240 x 6.5mm	2700k – 6300k	IP20	10,000

Example:

Wallpaper 120 480 x 240 2700 - 6300k IP20

Note:


Recommended distance mounting for homogenous light, mounting surface to illuminating surface.

With Lens 80mm to 200mm

Without lens >200mm

Maximum bending radius 20mm

(See Installation manual for more detail)



Energy efficiency class **A+**