





ARCHITECTURAL FX

Integrate COF (Homogenous)

General Information

- Flexible LED strip IP20
- 24v DC Constant Voltage
- Beam angle: 120°
- CRI >90
- R9 >65
- Homogenous with Opal Cover
- Increments 62.5mm, 50mm, 38.46mm
- LED Pitch 1.95mm
- LED Increment and pitch dependent on Power p/m
- Lifespan L70: ≥ 50,000 hours
- Dimmable – Mains (Triac) DALI, DMX, 0-10v
- Max Ambient operating temperature (7-10w/m 50°c, 20w/m 45°c, 25w/m 35°c)
- Integrate fixtures IP40, IP44
- 5 Year warranty

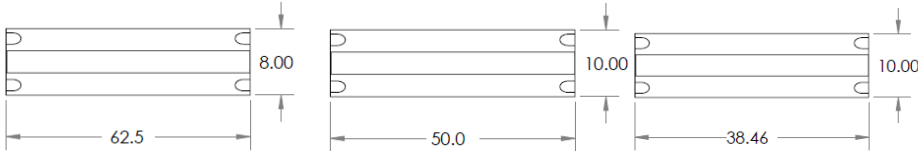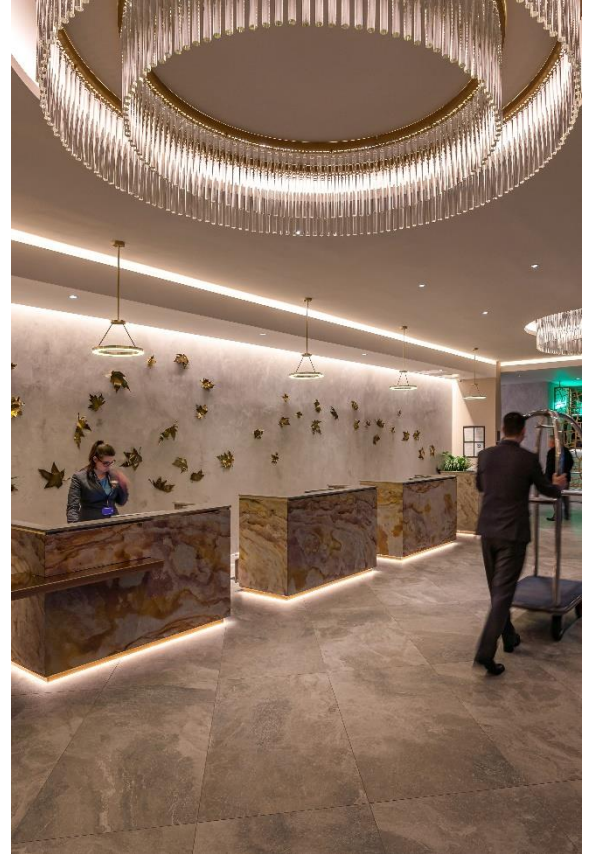

7-10w/m LED Increment 62.5mm
20w/m LED Increment 50mm
25w/m LED Increment 38.46mm

Integrate LED Code	CCT	7w/m	10w/m	20w/m	25w/m
		lm/m	lm/m	lm/m	lm/m
COF	2200k	600	796	1272	1790
COF	2500k	620	840	1350	1875
COF	2700k	639	900	1413	1966
COF	3000k	666	961	1455	2033
COF	4000k	699	1034	1500	2088



Note: -40% light loss with Opal cover

About the Light source:

24v, flexible LED strip with reflective, white surface and 3M adhesive tape on the back. Homogeneous light source for fixtures with Opal covers <15mm from LED to Opal cover. Bridgelux LEDs of the highest quality. 120° beam angle.

“One Bin Only” within 2 MacAdam

Integrated Constant Current technology to guarantee Constant color and Intensity over from first to last LED over lifetime

About the Fixtures:

A portfolio of Aluminium Recessed, Surface Mounted, Suspended or Plaster-In profiles, covers and mounting accessories for Interior, Exterior architectural and commercial applications.

(See separate pdf catalogue and specification builder for options)

Architectural FX Unit 10 Longshot Lane Industrial Estate Bracknell Berkshire RG12 1RL

T +44 (0)1344 291536 E sales@afx.lighting W www.afx.lighting